




# AC-DC 30W

## 6A-301DAXX




DESKTOP  
(AC Inlet C8)

**Features:**

- IEC/EN/UL/CUL 62368
- Universal AC Input 90~264Vac
- Regulated Output With Low Ripple Noise
- 100% burn in test
- 1 year warranty
- CEC,DoE Level VI,ErP Stage 2,CoC Tier 2,GEMS
- WEEE / ROHS 2.0 / REACH 2.0
- Safety : UL/CUL,CB,CE,FCC,CCC,PSE,RCM



**Dimension:**

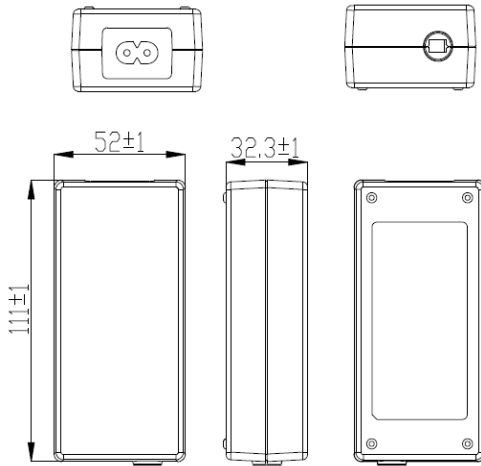

| Model No.  | O/P Voltage | O/P Current | O/P Watts |
|------------|-------------|-------------|-----------|
| 6A-301DA12 | 12.0V       | 2.5A        | 30.0W     |
| 6A-301DA15 | 15.0V       | 2.0A        | 30.0W     |
| 6A-301DA19 | 19.0V       | 1.6A        | 30.4W     |
| 6A-301DA24 | 24.0V       | 1.25A       | 30.0W     |

**Specification:**

|                   |   |   |
|-------------------|---|---|
| Input             | Voltage   | AC 90V~264V Universal Full Range  |
|                   | Frequency   | 47-63Hz   |
|                   | Current   | 1.0A  |
|                   | Leakage Current   | < 0.25mA  |
| Others Protection | Start up time   | < 3000mS @115VAC Full Load  |
|                   | Rise time   | <20mS   |
|                   | Hold up time  | >20mS @ 230Vac/50Hz input   |
|                   | Protection  | OCP/OVP/SCP   |
|                   | Cooling   | Natural Convection Cooling  |
| Environment       | Temperature   | Operating: 0~40°C;Storage: -10~+70°C  |
|                   | Humidity  | Operating: 20%~85%;Storage: 10%~95%(Non Condensing)                             |
| M.T.B.F           | 50k Hours MIL-HDBK-217F @ 115VAC/ 230VAC Full Load Ambient : 25°C |   |
| Safety Regulation | UL 62368-1, CSA C22.2 No.62368-1, IEC62368-1 , EN62368-1          |   |
| EMC               | EMI   | FCC CFR 47 PART 15B , EN55032 , EN61000-3                                       |
|                   | EMS   | EN55024(EN61204-3) , EN61000-4  |
| Energy Efficiency | Average active efficiency   | 30W > 86.95% Min @230Vac / 50Hz input ; 30.4W > 86.99% Min @230Vac / 50Hz input |
|                   | Efficiency at low load (10 %)                                     | 30W > 76.95% Min @230Vac / 50Hz input ; 30.4W > 76.99% Min @230Vac / 50Hz input |
|                   | No-load power consumption   | > 0.1W Min @ 230Vac / 50Hz input  |

英格爾科技股份有限公司  
ENG ELECTRIC CO.,LTD.

台灣桃園市龜山區民生北路1段536號5樓  
5F., No. 536, Sec. 1, Minsheng N. Rd.,  
Gueishan Dist., Taoyuan City 333016,  
Taiwan (R.O.C.)



TEL:886-3-212-1122 FAX:886-3-212-1570 E-mail:eng@eng.com.tw http://www.eng.com.tw

