




USB PD 3.0 100W Bidirectional Converter

9E-PD2301

Features:

- Two-Way charge USB PD3.0 for 100W max
- Output Load : USB Type C PD 3.0 100W max (at E-mark)
- Output Current max 5.0A (at E-mark)
- ROHS 2.0 Compatible

Dimension:

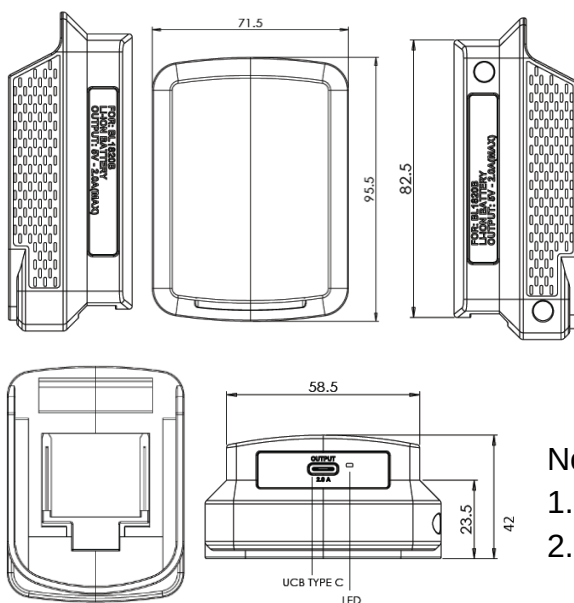

Model No.	O/P Voltage	O/P Current	O/P Watts
9E-PD2301 (PD/TYPE C) (100W Max)	5.0V	3.0A	15.0W
	9.0V	3.0A	27.0W
	15.0V	3.0A	45.0W
	20.0V	3.0~5.0A	100.0W

Note:

1. 使用時須先將adaptor扣上電池, 再接PD電源
2. 請特別留意, 先將adaptor接上PD電源之後再扣上電池, 回路會判斷到異常負載變化, 變成低功率模式。

Specification:

Input	Voltage	USB Type C PD3.0 5.0V/9.0V/15.0V/20.0V
	Current	Max 5.0A (max 100W at 20V for E-mark)
Output	Voltage	5.0V/9.0V/15.0V/20.0V
	Current	Max 5.0A (max 100W at 20V for E-mark)
	LED display	Charge : Red LED flashing
		Charge completed : Red LED always On
		Discharge : Blue LED always On
Protection	Protection	Fuse
		Temperature protection (inside at 75±5°C)
Environment	Temperature	Operating: 0~40°C; Storage: -10~+70°C
	Humidity	Operating: 20%~85%; Storage: 10%~95%(Non Condensing)

英格爾科技股份有限公司
ENG ELECTRIC CO.,LTD.

台灣桃園市龜山區民生北路1段536號5樓
5F., No. 536, Sec. 1, Minsheng N. Rd.,
Guishan Dist., Taoyuan City 333016,
Taiwan



TEL:886-3-212-1122 FAX:886-3-212-1570

E-mail:eng@eng.com.tw

http://www.eng.com.tw

