



# AC-DC 10W

## 6A-107WP05B




WALL-MOUNT  
(Interchangeable)


### Features:

- IEC/EN 60601-1, 2 x MOPP
- Universal AC Input 90~264Vac
- Regulated Output With Low Ripple Noise
- Super Low Leakage Current < 0.1uA
- 100% burn in test
- 1 year warranty
- WEEE / ROHS 2.0 / REACH 2.0
- Safety : CB,CE

### Dimension:

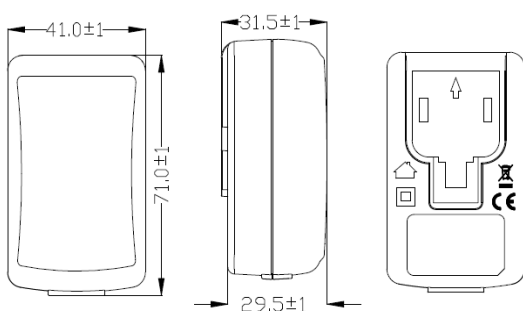

| Model No.   | O/P Voltage | O/P Current | O/P Watts |
|-------------|-------------|-------------|-----------|
| 6A-107WP05B | 5.0V        | 2.0A        | 10.0W     |

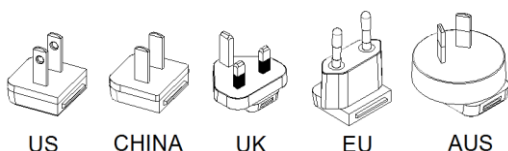

### Specification:

|                   |                                                                  |                                                      |
|-------------------|------------------------------------------------------------------|------------------------------------------------------|
| Input             | Voltage                                                          | AC 90V~264V Universal Full Range                     |
|                   | Frequency                                                        | 47-63Hz                                              |
|                   | Current                                                          | 300mA                                                |
|                   | Leakage Current                                                  | < 0.1mA                                              |
| Others Protection | Start up time                                                    | < 3000mS @115VAC Full Load                           |
|                   | Rise time                                                        | <20mS                                                |
|                   | Hold up time                                                     | >20mS @ 230Vac/50Hz input                            |
|                   | Protection                                                       | OCP/OVP/SCP                                          |
|                   | Cooling                                                          | Natural Convection Cooling                           |
| Environment       | Temperature                                                      | Operating: 0~40°C; Storage: -10~+70°C                |
|                   | Humidity                                                         | Operating: 20%~85%; Storage: 10%~95%(Non Condensing) |
| M.T.B.F           | 50K Hours MIL-HDBK-217F @115VAC/ 230VAC Full Load Ambient : 25°C |                                                      |
| Safety Regulation | IEC60601-1 , EN60601-1                                           |                                                      |
| EMC               | EMI                                                              | FCC CFR 47 PART 15B , EN55011 , EN61000-3            |
|                   | EMS                                                              | EN55011(EN61204-3) , EN61000-4                       |

英格爾科技股份有限公司  
ENG ELECTRIC CO.,LTD.

台灣桃園市龜山區民生北路1段536號5樓  
5F., No. 536, Sec. 1, Minsheng N. Rd.,  
Guishan Dist., Taoyuan City 333016,  
Taiwan



TEL:886-3-212-1122

FAX:886-3-212-1570

E-mail:eng@eng.com.tw

http://www.eng.com.tw

